

zehnder toga

zehnder

always
around you

Heating


Cooling

Fresh Air

Clean Air



Overview of models

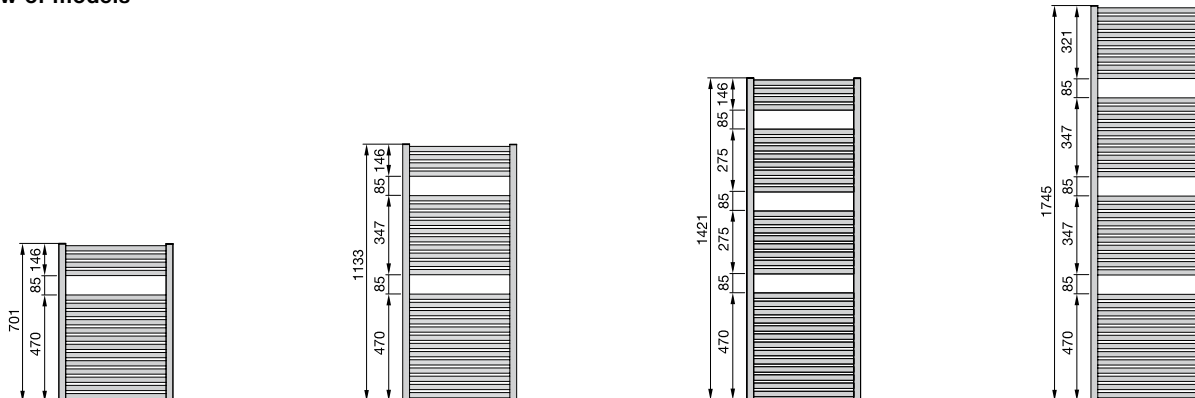

Product description

Bathrooms, kitchens, home gyms and guest bathrooms: with its practical dimensions and particularly good heat output, Zehnder Toga is suitable for use in many different situations and can even be used as a room divider.

Benefits

- Harmonious design through D-profile of vertical tubes
- Can be used as a room divider
- Large cut-outs
- High output due to internal tube design
- Wide range of models
- Top-grade chrome finish
- Side connections for easy replacement of old radiators

Connection to central heating system

Painted version

Model	H mm	L mm	Thermal output			Exp. n	Classification of immersion heater (W)	V dm ³	M kg
			EN 442 ① W	70/55/24 W	55/45/24 W				
TO-070-045	716	450	352	250	153	1.26	300	3.6	5.4
TO-120-045	1148	450	536	378	228	1.29	300	5.3	8.7
TO-180-045	1760	450	842	594	358	1.29	600	8.6	13.5
TO-070-050	716	500	387	276	169	1.25	300	3.8	5.9
TO-120-050	1148	500	595	420	253	1.29	600	5.8	9.4
TO-150-050	1436	500	729	515	312	1.28	600	7.4	11.7
TO-180-050	1760	500	928	654	395	1.29	900	9.3	14.7
TO-070-060	716	600	456	326	200	1.24	300	4.3	6.8
TO-120-060	1148	600	713	503	303	1.29	600	6.8	10.7
TO-150-060	1436	600	871	616	373	1.28	600	8.5	13.4
TO-180-060	1760	600	1102	775	465	1.30	900	10.7	16.8
TO-120-075	1148	750	890	628	378	1.29	900	8.4	12.8
TO-180-075	1760	750	1362	958	575	1.30	1200	12.9	20.1
TO-180-100	1760	1000	1796	1259	753	1.31	1200	16.5	25.7

H = Height

L = Length

① = Thermal output per section measured according to EN 442, ΔT 50 K (75/65/20°C)

V = Water capacity

M = Weight